

Compliance monitoring of Spark cellsites: annual summary 2017-18

This report was prepared for:
Compliance Manager
Spark New Zealand Ltd
42-52 Willis Street
Wellington

Report prepared by: Martin Gledhill
Finalised: 18 September 2018

About EMF Services and the author of this report

EMF Services is a division of Monitoring and Advisory Services NZ Ltd (MAASNZ), and provides professional measurement and advisory services related to possible health effects of electromagnetic fields (EMFs), such as the extremely low frequency (ELF) electric and magnetic fields found around any wiring, appliances or infrastructure carrying mains electricity, and the radiofrequency (RF) fields produced by radio transmitters and some industrial equipment.

Martin Gledhill has an MA degree in Natural Sciences (Physics) and an MSc in Medical Physics. He is a member of the Australasian Radiation Protection Society and of the Bioelectromagnetics Society. Before forming MAASNZ he was head of the non-ionising radiation section at the National Radiation Laboratory of the New Zealand Ministry of Health. In this position he provided advice to central and local government, the public and industry on the health effects of EMFs, and carried out measurement and assessment services in this area. This work included providing policy advice to the Ministries of Health and the Environment, preparation of public information material, presenting expert evidence at local authority and Environment Court hearings, and assessing exposures to EMFs by both measurements and calculations.

EMF Services
P O Box 17
Clyde 9341
New Zealand

info@emfservices.co.nz
www.emfservices.co.nz
+64 27 545 4217

Compliance monitoring of Spark cellsites: annual summary 2017-18

1 Introduction

Spark New Zealand Ltd has commissioned EMF Services to carry out compliance monitoring of exposures to radiofrequency (RF) fields around their cellsites. This report presents the results of measurements at 48 sites carried out between mid-June 2017 and June 2018. The purpose of the tests is to measure exposures to radiofrequency (RF) fields near Spark cellsites to determine the maximum exposure at the time the measurements were made, and the maximum possible exposure should all the equipment at the Spark site (and any other transmitters nearby) operate at full power. Exposures are compared against the appropriate limits in New Zealand Standard 2772.1:1999 *Radiofrequency Fields Part 1: - Maximum exposure levels 3 kHz - 300 GHz*, as required by the Resource Management (National Environmental Standards for Telecommunications Facilities) Regulations 2016 (“the NES”).

Sites selected for testing fall into one of four categories:

- They have been of particular interest to the public, or because of their location, might be so in the future;
- Calculations of exposure have significant uncertainty;
- It is difficult to determine the areas near a site with reasonable public access;
- Theoretical assessment of compliance is difficult due to the proximity of other transmitters (eg co-siting with another operator).

Some sites are pre-selected by Spark, while others which fall into one or more of the above categories are selected by EMF Services. Spark are not informed when the testing will take place. Six of the sites were repeat visits, either because new equipment had been added since the previous visit, or to check whether the contribution from other nearby sites had changed much.

2 Overview of measurement methodology

A full description of the measurement equipment, methodology, post-processing of the data and uncertainty analysis for the monitoring is presented in EMF Services Report 2017/112 *Compliance testing of Spark cellsites: methodology. Revision 3..* This updates the previous (Revision 2) report 2016/119 to take account of changes in frequency bands, and make a few other minor updates. The measurement equipment used for these surveys was calibrated in March 2017.

In summary, a preliminary survey of the area around a site is made using a broadband measurement probe. This meter measures the overall exposure from all transmitters that might contribute to the total but is not able to distinguish the individual contributions from each transmitter. Because the exposure limit in NZS 2772.1:1999 depends on the transmitter frequency, and cellsites transmit at several frequencies, it is not possible to use the readings from the broadband measurements to determine precisely the exposure as a percentage of the public limit in the Standard. Nor is it possible to use the measurements to determine what the exposure would be if all transmitters at a nearby

cellsite were operating at full power. On the other hand, the broadband measurements provide a ready means to find how exposures vary around a site, and find the locations where exposures tend to be highest.

Once the locations where exposures are highest have been determined using the broadband meter, a narrowband meter is used to take further measurements. The narrowband meter is able to determine the contribution to exposure in different frequency bands, and measure components of cellphone base station transmitters from which the maximum possible exposure from that transmitter can be determined. Narrowband measurements are used to:

- Determine the contributions from different transmitters to the overall total;
- Evaluate the exposure at the time of measurement as a percentage of the public limit in NZS 2772.1:1999;
- Determine what the maximum possible exposure would be if all the Spark equipment, and any other transmitters nearby, were operating at full power.

The measurement method used tends to result in the exposure at the time of measurement, and the maximum possible exposure, being overestimated. It is also worth noting that, in practice, there is very little likelihood of all transmitters at a cellsite operating simultaneously at full power.

3 Summary of results

3.1 Results for 2017-18

Figure 1 presents a histogram of the maximum exposure from all sources (ie from the Spark site of interest and any other transmitters nearby) measured during the survey with the narrowband meter, at the 48 sites surveyed in the 2017-18 period. 25 of the sites were either shared with, or close to, sites belonging to one or two other mobile phone network operators. Exposures are expressed as a percentage of the public limit in NZS 2772.1:1999, and the graph shows the percentage of sites falling into each exposure category.

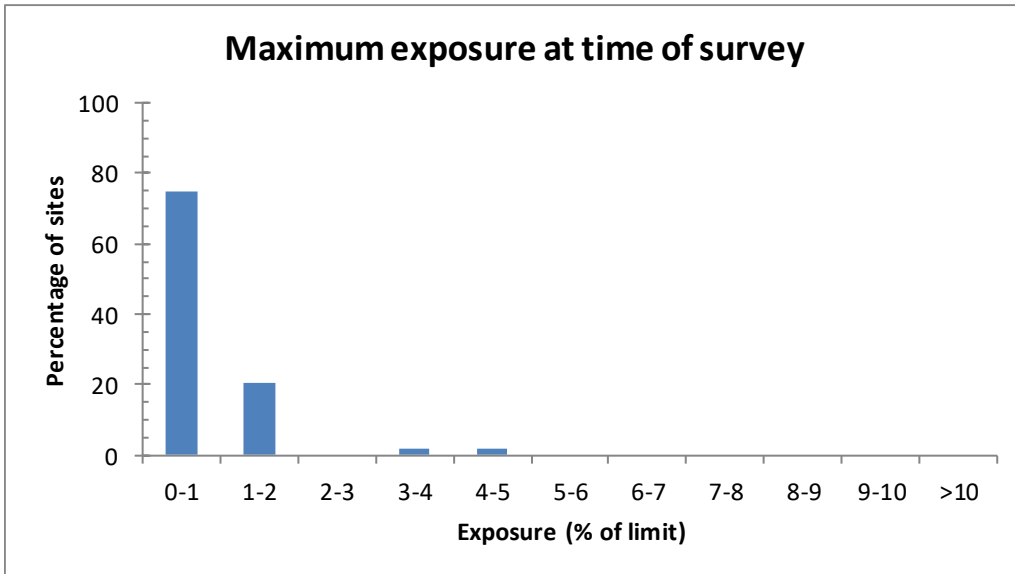


Fig 1. Histogram of maximum exposures found at the time of measurement at the 48 sites surveyed in 2017-18.

This graph shows that, for example, at 75% of the sites tested (36 out of 48), exposures at the time the measurements were made were less than 1% of the public limit. The highest exposure measured at the time of the survey was equivalent to 5% of the public limit.

Figure 2 shows the maximum possible cumulative exposure at the 48 sites, if all the Spark transmitters, and transmitters belonging to other cellular network operators nearby, were to transmit simultaneously at full power.

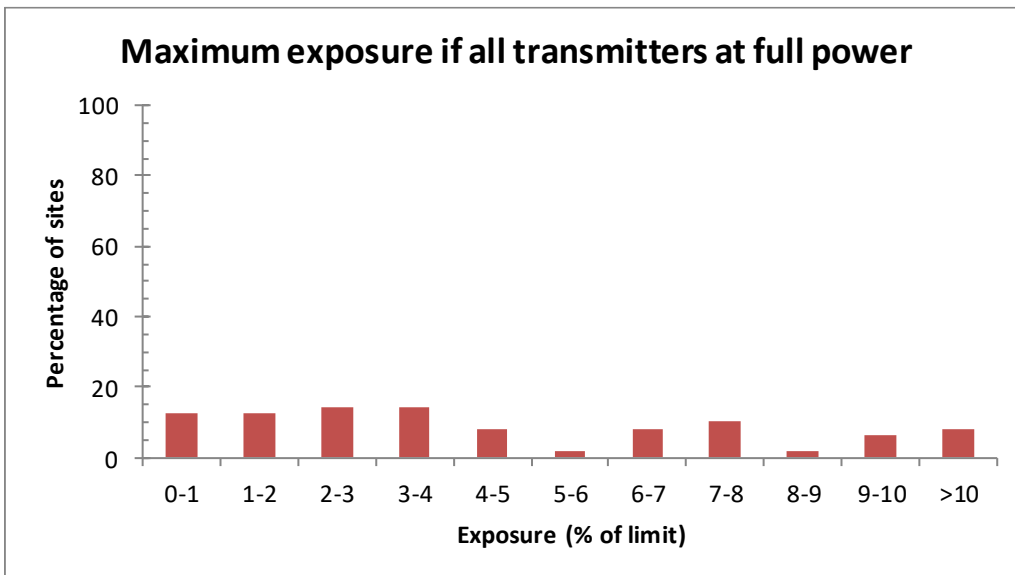


Fig 2. Histogram of maximum possible exposures at the 48 sites surveyed in 2017-18, if they and all other sites nearby were to transmit at full power.

This graph shows that at 12.5% of the sites tested, the maximum possible cumulative exposure would be less than 1% of the public limit, and at a further 12.5% of sites the maximum possible exposure would be between 1% and 2% of the limit. Four sites had a maximum possible exposure greater than 10% of the public limit and these are noted in the table below:

Location of maximum possible exposure	Maximum possible exposure (% of public limit)
On footpath near a lamppost site	35
On a lookout platform around a water tower, two other operators nearby	22
On a footbridge near the site, two other operators nearby	17
On footpath near the site, two other operators nearby	16

3.2 Results for 2014-18

Figures 3 and 4 present the same data for all 195 sites measured since 2014.

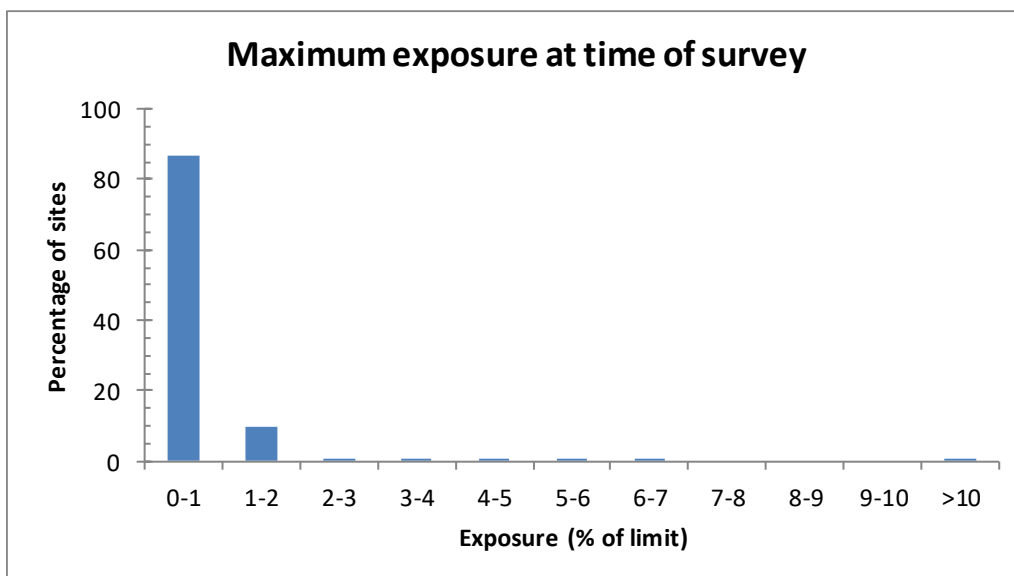


Fig 1. Histogram of maximum exposures found at the time of measurement for all 195 sites surveyed since 2014.

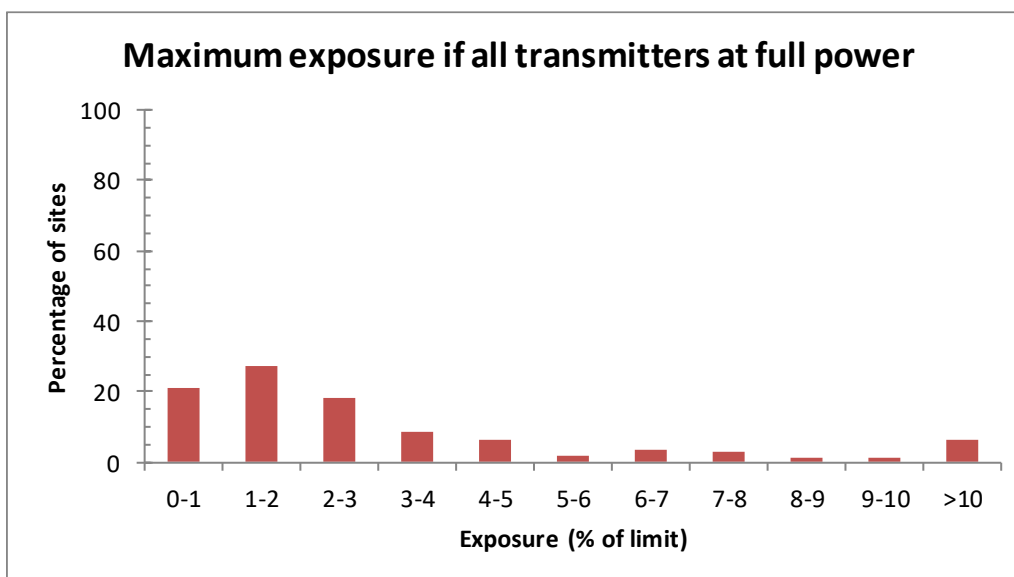


Fig 2. Histogram of maximum possible exposures for all 195 sites surveyed since 2014, if they and all other sites nearby were to transmit at full power.

4 Results table

A summary of results for the individual sites surveyed in 2017-18 is presented in the table below.

Town/city, name of site	Date measured	Type of site*	Max exposure at time of survey (% of public limit)	Max possible exposure (% of public limit)	Comments
Auckland, Auckland Public Library	1/02/18	Lamppost, commercial	1.80	17.00	Vodafone and 2degrees nearby
Auckland, Birkenhead	23/11/17	Residential, rooftop	1.40	9.20	Vodafone collocated, 2degrees nearby
Auckland, Dannemora	14/09/17	Commercial, lamppost	0.52	2.80	2degrees nearby
Auckland, Duke Park	24/01/18	Residential, lamppost	0.39	2.70	Vodafone and 2degrees nearby
Auckland, Eskdale Road	11/04/18	Lamppost, residential	0.63	9.60	
Auckland, Farm Cove	14/09/17	Residential, clocktower	0.38	3.10	Vodafone collated
Auckland, Garnet Road	15/09/17	Residential, lamppost	0.92	10.00	Vodafone nearby
Auckland, Glen Orchard (2)	15/09/17	Residential, lamppost	1.60	7.50	Vodafone and 2degrees collocated
Auckland, James Fletcher Drive relocate	14/09/17	Monopole, commercial	0.38	3.50	
Auckland, Kerwyn Avenue	29/07/17	Commercial, monopole	0.17	1.40	Vodafone, 2degrees nearby
Auckland, Long Bay	2/02/18	Reserve, monopole	0.03	0.26	
Auckland, Long Bay West	10/04/18	Lamppost, residential	0.78	7.00	
Auckland, New Lynn	2/02/18	Commercial, rooftop	1.20	7.60	2degrees cosited, Vodafone nearby
Auckland, Orakei	16/06/17	Reserve, rooftop	0.71	4.10	Vodafone, 2degrees nearby
Auckland, Orams Road	26/07/17	Residential, monopole	0.09	0.87	
Auckland, Otahuhu	12/04/18	Rooftop, residential	0.30	2.80	
Auckland, Ponsonby Williamson	16/06/17	Commercial, lamppost	0.51	2.10	Vodafone nearby
Auckland, Symonds Grafton (2)	9/04/18	Lamppost, commercial	1.40	16.00	Vodafone and 2degrees nearby
Auckland, Titirangi	2/02/18	Rooftop, residential	0.12	0.63	

Town/city, name of site	Date measured	Type of site*	Max exposure at time of survey (% of public limit)	Max possible exposure (% of public limit)	Comments
Auckland, Totara Heights	12/04/18	Lamppost, residential	0.07	0.49	
Auckland, Westmere	15/09/17	Residential, rooftop	1.50	6.50	Vodafone collocated, 2degrees nearby
Auckland, Grey Lynn	23/11/17	Commercial, lamppost	0.28	1.20	Vodafone and 2degrees nearby
Tauranga, Brookfield (2)	28/07/17	Residential, monopole	0.91	4.30	2degrees nearby
Tauranga, Judea (2)	28/07/17	Residential, monopole	0.29	2.20	
Auckland, Birkdale	22/11/17	Commercial, monopole	0.91	7.50	Vodafone and 2degrees nearby
Auckland, Henderson Shops	24/11/17	Commercial, rooftop	1.50	8.90	
Te Puke, Te Puke Town	27/07/17	Commercial, monopole	0.40	4.30	
Taranaki, Hawera	19/09/17	Rooftop, commercial	1.10	22.00	Vodafone and 2degrees collocated
Taranaki, New Plymouth Central	20/09/17	Commercial, monopole	0.16	1.00	
Taranaki, Strandon	19/09/17	Commercial, monopole	0.14	1.70	
Taranaki, Stratford Town	19/09/17	Monopole, commercial	3.80	3.80	
Taranaki, Waitara Town	20/09/17	Residential, monopole	0.17	1.30	
Palmerston North, College Street	20/02/18	Lamppost, residential	0.48	3.40	2degrees nearby
Palmerston North, Levin Exchange	21/02/18	Monopole, residential	0.18	1.20	
Palmerston North, St Peters	20/02/18	Rooftop, residential	0.42	2.30	Vodafone and 2degrees nearby
Wellington, Appleton Park	1/05/18	Lamppost, reserve	0.89	6.80	Vodafone and 2degrees nearby
Wellington, Miramar	2/05/18	Monopole, residential	0.70	3.70	
Wellington, Penthouse Cinema	1/05/18	Rooftop, residential	0.55	6.50	Vodafone and 2degrees nearby
Wellington, Seatoun	30/04/18	Lamppost, residential	0.50	4.60	2degrees nearby

Town/city, name of site	Date measured	Type of site*	Max exposure at time of survey (% of public limit)	Max possible exposure (% of public limit)	Comments
Wellington, Te Marua	17/08/17	Residential, monopole	0.03	0.27	2degrees nearby. Landowner survey
Wellington, Wadestown Road (2)	22/08/17	Residential, lamppost	4.50	35.00	
Christchurch, Barrington Park	7/11/17	Residential, monopole	0.49	3.30	
Christchurch, Casebrook (2)	22/05/18	Lamppost, residential	1.40	8.00	
Christchurch, New Brighton Locksley	7/11/17	Reserve, lamppost	0.81	5.30	
Christchurch, Papanui Road	6/11/17	Residential, monopole	1.30	7.40	
Christchurch, Rangiora South	21/11/17	Commercial, monopole	0.40	1.50	
Canterbury, Timaru West Gleniti	23/05/18	Monopole, residential	0.23	2.10	Vodafone nearby
Canterbury, Waimataitai	23/05/18	Monopole, commercial	0.40	3.70	Vodafone nearby
Otago, Oamaru Town	8/01/18	Commercial, monopole	0.13	1.20	Vodafone nearby

*Type of site shows where the antennas are mounted, and the predominant nature of the surrounding area.