


Response to Urban and Built Environment Fires

Guidelines for Public Health Officers

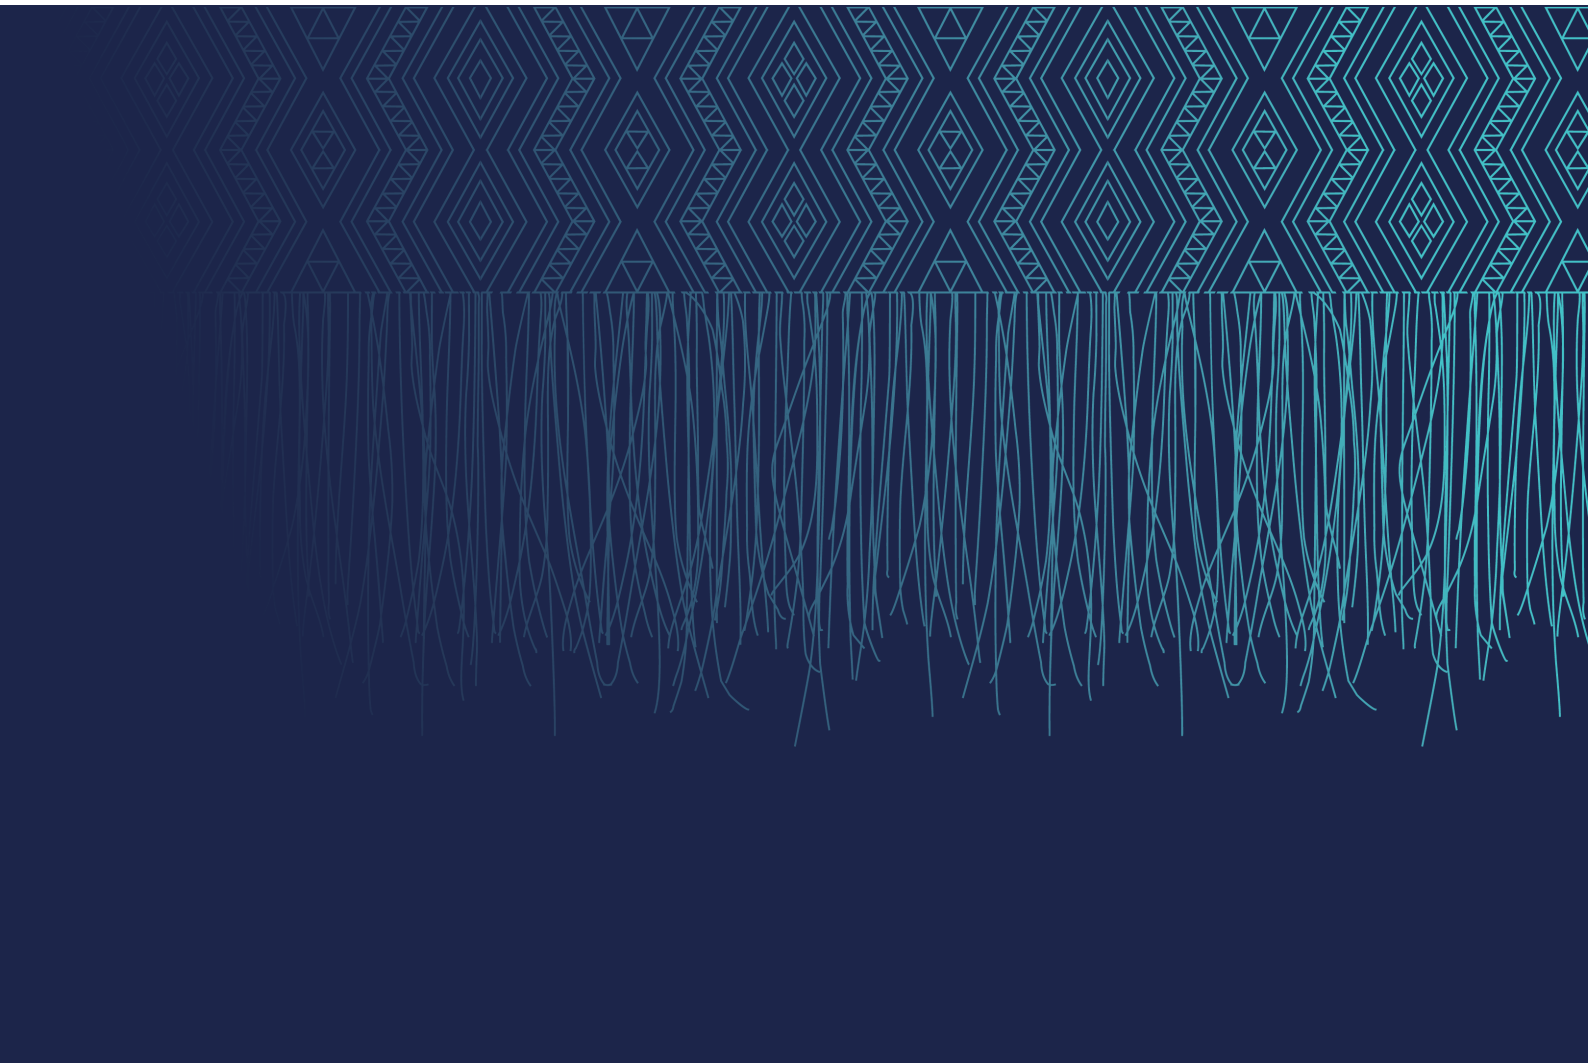

Citation: Te Whatu Ora – Health New Zealand. 2023. *Response to Urban and Built Environment Fires: Guidelines for Public Health Officers*. Wellington: Te Whatu Ora – Health New Zealand.

Published in September 2023 by Te Whatu Ora – Health New Zealand
PO Box 793, Wellington 6140, New Zealand

This document has been revised from the version published in January 2014 by the Ministry of Health, PO Box 5013, Wellington, New Zealand.

ISBN 978-1-99-106762-3 (online)

Te Whatu Ora
Health New Zealand

This document is available at tewhatauora.govt.nz



This work is licensed under the Creative Commons Attribution 4.0 International licence. In essence, you are free to: share ie, copy and redistribute the material in any medium or format; adapt ie, remix, transform and build upon the material. You must give appropriate credit, provide a link to the licence and indicate if changes were made.

Contents

Introduction	1
1 Being prepared	3
1.1 Planning and preparedness	3
1.2 Knowing the hazardous sites	3
1.3 When to notify public health officers	4
2 Roles and responsibilities	5
2.1 When a fire occurs	5
2.2 After the fire	5
3 Toxic products from fires	6
3.1 Types of toxic products	6
3.2 Potentially hazardous facilities and combustion products	7
3.3 Types of fires and their products	7
3.4 Combustion products	8
3.5 Fires involving specific substances	9
4 Public health risk assessment	12
4.1 Initial assessment	12
4.2 Further assessment	13
5 Evacuation or sheltering?	15
5.1 Aspects to consider when deciding whether to evacuate or shelter	15
5.2 Evacuation	16
5.3 Sheltering	18
6 Environmental sampling	19
6.1 When to consider collecting environmental samples	19
6.2 Where to collect samples	19
6.3 Preparing a sampling plan	20
6.4 What samples should be collected?	21
6.5 Sample collection	22

6.6 Analysis suites (water, soil, dust wipes, air)	24
6.7 Sample transport and storage	25
6.8 Ambient air monitoring	25
6.9 Interpreting the sampling results	26
7 Communication	29
7.1 During the fire	29
7.2 After the fire	30
8 Health monitoring	31
8.1 Immediate health effects	31
8.2 Long-term health effects	32
9 Resources and sources of information	33
Appendix 1: Public health aspects arising from a fire involving asbestos containing materials: fact sheet	34
Thermal stability of asbestos	34
Effect of fire on asbestos fibre contamination	34
Exposure of the general population	35
Mitigating factors against significant exposures of the general public following a fire involving ACM	36
Acute adverse health effects	36
Long-term adverse health effects	36
Evacuation	37
Laboratory analysis	37
Effect of watering	37
Conclusions	38
Bibliography	38
Appendix 2: Centers for Disease Control and Prevention's resources for crisis and emergency risk communication	40
Message development for emergency communication	40
Six basic emergency message components	40
You're the spokesperson – what you need to know	42

Appendix 3: Examples of health information for the public	43
Appendix 4: Checklist for health questionnaire content	44
Demographic information	44
Exposure information	44
Health effects	44
Potential risk factors	45
Action taken and outcome	45
Hospital admission	45
References	46
 List of tables	
Table 1: Indicative combustion products for certain burning materials	10
Table 2: Combustion products generated from certain materials outside the immediate fire zone	11
Table 3: Information needed to prepare a sampling plan.	20
Table 4: Sample collection guidelines	23
Table 5: Possible analytical tests according to sample type	26
Table 6: Guidelines and standards for interpreting sampling results	27

Introduction

The purpose of these guidelines is to assist public health officers' response to major fires in urban and built environments to minimise public health risk. Urban and built environments can be defined as areas that include man-made structures, features, and facilities where people live and work. For fires and incidents that involve scrub or bush fires, the relevant guidelines are: *Response to Wildfires – Guidelines for Public Health Officers* (Te Whatu Ora 2023a).

The most significant industrial fires in New Zealand have been the 1984 ICI warehouse fire in Mount Wellington, Auckland, which led to the risk management framework for hazardous substances that exists today, and the 2008 Icepak cool stores fire in Tamahere, near Hamilton. Other examples of major fires include VJ Distributors in Hastings (2006), the former Patea freezing works (2008), the former Southdown freezing works in Penrose, Auckland (2008), Miller Moyes Seacraft, in Ellerslie, Auckland (2010), the former Waipukurau Hospital (2010), the Silver Fern freezing works in Te Aroha, near Hamilton (2010), and the SkyCity Convention Centre fire (2019).

Fires can expose people to a range of hazardous substances. In fact, every major fire is a chemical incident (WHO 2009). The size and scale of fire events vary greatly, and the consequences of these releases are also variable. The longer a fire burns, the more products of combustion are formed.

Fires can pose a substantial threat because:

- They release chemicals into the air that may disperse at concentrations well above background levels
- New chemicals can be formed as a result of combustion
- The dispersion of fire-fighting water can cause material from the fire to enter waterways
- The density of people increases in an urban environment.

There may also be intense local deposition of material from the fire, including parts of the structure of the impacted buildings.

In cases of fires in the urban and built environment, public health officers in the National Public Health Service within Te Whatu Ora – Health New Zealand (NPHS) may be involved if there are risks to public health. The NPHS may be asked for advice on environmental sampling during and after fires, as well as advice on other health-related matters such as evacuation and sheltering. This advice will need to be incident-specific because the combustion products produced will vary depending on the chemicals and

materials present and the temperature of the fire, as well as the numbers and vulnerabilities of people who may be exposed (eg. children, older people).

These guidelines provide an overview of the types of contaminants that can be released during fires and the information that needs to be collected to inform decisions on sampling and analysis. They also include advice on evacuation versus sheltering in relation to fire incidents, health monitoring and communication. They do not replace local hazardous substance incident protocols and should be read alongside the latest version of the *National Hazmat Public Health Incident Response Plan*.

Major changes to this edition include the removal of references to wildfires, which are now covered in *Response to Wildfires – Guidelines for Public Health Officers* (Te Whatu Ora 2023a), and advice on drinking water, which is now the responsibility of Taumata Arowai. Organisational names and references have also been updated.

Out of scope

Drinking water: Taumata Arowai is the water services regulator and implements the Water Services Act 2021. If a drinking water source is or may be contaminated, the drinking water supplier and Taumata Arowai should be notified. To notify Taumata Arowai, email notifications@taumataarowai.govt.nz. If there is an immediate risk to public health from drinking water, call 04 889 8350.

Environmental effects: Are the responsibility of the regional and local councils (or unitary authority).

Food: The Ministry for Primary Industries is the food safety regulator. If food products are affected or may become contaminated, notify the Ministry for Primary Industries by emailing info@mpi.govt.nz or phone 0800 00 83 33.

Occupational exposures and other workplace risks: These guidelines do not include responding to fires within workplaces or effects on workers. The safety of workers, including Fire and Emergency New Zealand staff, is the responsibility of the person(s) conducting the business or undertaking (PCBU) and enforced by WorkSafe New Zealand under the Health and Safety at Work Act 2015. Public health officers must not give advice to response agencies on health and safety requirements for their staff.

Radioactive and infectious substances: the Fire and Emergency New Zealand Act 2017 includes radioactive and infectious substances in its definition of hazardous substances; however, these guidelines do not include responding to fires involving radioactive substances (Class 7) or infectious substances (Class 6.2).

1 Being prepared

1.1 Planning and preparedness

The current version of the National Hazmat Public Health Incident Response Plan provides advice on the public health response to a hazmat incident and is based on the national hazmat response framework. It has been agreed upon at a national level with key response agencies. It sets the framework under which local public health hazmat incident response plans should be developed, including:

- Managing a hazmat incident identified via a '111' call
- Establishing a 24-hour national notification and response capability
- Providing early expert public health advice to emergency services at the scene of an event
- Providing expert public health advice and support within a target time to emergency services
- Establishing clear responsibility for “clean-up” of the event (generally this is the responsibility of the owner of the hazardous substance or the landowner/occupier of the site)
- Supporting the lead agency by providing public health advice following the incident
- Establishing a communication route for expert advice and technical support on public health matters
- Confirming the framework for public information management, including media responses and communications with stakeholders and the public. Generally, these are coordinated through the incident commander or incident management team of the lead agency to ensure consistent messaging. Any statements or advice should be approved by the incident commander before distribution.

1.2 Knowing the hazardous sites

An overview of the location and nature of highly hazardous sites, including tyre dumps and waste sites within your region, is important for understanding the potential risk to public health. Being prepared in this way is useful not only for fires, but also for chemical spills and other releases of potential public health significance.

The main focus should be on identifying specific sites, or industrial areas that are likely to include such sites and are close to residential areas. Identification may be a result of

resource consent applications, WorkSafe New Zealand advice, or territorial authority information.

1.3 When to notify public health officers

Criteria for Fire and Emergency New Zealand (FENZ) to notify public health officers should be agreed locally. Typically, such criteria include the scale of the event, multi-agency involvement, involvement of a FENZ hazmat/command vehicle, contamination of water, evacuation or sheltering of the public, and involvement of sensitive locations.

2 Roles and responsibilities

2.1 When a fire occurs

The main roles and responsibilities of public health officers in relation to a fire are described in the current version of the *National Hazmat Public Health Incident Response Plan* but generally include:

- Public health risk assessment
- Provision of public health advice: to the incident controller and the public (both via the media and directly to evacuees)
- Provision of information to GPs and the hospital emergency department (if required)
- Environmental sampling, if appropriate.

Depending on local circumstances, public health officers may be asked to advise whether residents should be evacuated and when evacuated residents are able to return home, including any associated risks. In some circumstances it may also be necessary to consider recommending the closure of nearby schools, early childhood centres and residential aged care facilities to prevent public exposure.

Once notified of the fire and if the information indicates actual or potential casualties, it is useful to check that the local Te Whatu Ora-Health New Zealand emergency manager has been notified (thus forewarning the hospital emergency department). Depending on the scale of the fire, the NPHS office may activate an incident management team.

2.1.1 When attending fire incidents

Unlike FENZ staff, the public health officers are not trained to actively involve themselves in fire incidents. Public health officers must **not**:

- Enter the hot zone
- Enter areas where specialised personal protective equipment (PPE) is required.

2.2 After the fire

Within 24 hours of an incident, public health officers should notify the Environmental Protection Authority and NPHS via a Hazardous Substance Incident Report. After the incident, public health officers should hold internal debriefings to identify the lessons learned and, if required, which procedures should be updated. Public health officers should also participate in any external debriefings (for example, if convened by the local HazMat Coordination Committee).

3 Toxic products from fires

Fires in structures such as factories can vary markedly in size, intensity and type of materials involved. Chemical reactions will occur both during the fire, as a result of combustion and mixing with water (or foam), and after, when the chemicals enter the wider environment. The combustion temperature and environmental conditions will have an effect on dispersion of the smoke.

3.1 Types of toxic products

Toxic products from fires can be divided into three categories: asphyxiants, irritants and other products. These are expanded on below.

Asphyxiants

There are two main types of asphyxiants:

- Simple asphyxiant gases (eg, methane and nitrogen), which displace oxygen, causing hypoxia
- Chemical asphyxiants, which interfere with oxygen delivery (eg, hydrogen cyanide and carbon monoxide, which may be rapidly fatal).

Asphyxiants are a major hazard inside burning buildings. They can also be a hazard in the immediate areas surrounding the fire in some circumstances.

Irritants: inorganic acid gases and organic irritants

Smoke irritants are potential causes of adverse health effects, not only inside buildings but also in smoke dispersed into wide open areas. Irritants include:

- Inorganic acid gases (eg, hydrogen chloride, hydrogen bromide, hydrogen fluoride, nitrogen oxides, sulphur dioxide and phosphorous pentoxide)
- Organic irritants (eg, formaldehyde, acrolein and crotonaldehyde).

Other products

This category covers any chemical present — in bulk or that is toxic at low concentrations — that could be released in the fire plume¹ and may have important short- and long-term

¹ The fire plume is defined as the motion generated by a source of buoyancy, which exists by virtue of combustion and may incorporate an external source of momentum. The buoyancy source may be due to glowing or flaming combustion of a solid or liquid with no external source of momentum, or to gaseous, liquid, spray, or aerosol discharge from an opening at various mixes of mass flow and momentum.

health implications; for example, particulate matter (PM₁₀ and PM_{2.5},² polycyclic aromatic hydrocarbons (PAHs) and dioxins³ (Health Protection Agency 2002).

Dioxins are formed at very low levels in most combustion processes, but especially from burning chlorinated organic compounds. Their toxicity is due to their environmental persistence and consequent dietary exposure.

3.2 Potentially hazardous facilities and combustion products

Potentially hazardous facilities may include:

- Chemical storage facilities
- Industrial facilities that use, manufacture or store chemicals
- Bulk fuel storage
- Tyre manufacture and storage
- Plastic manufacture and storage
- Clandestine drug laboratories.

Building materials that are likely to be hazardous or to produce hazardous combustion products include:

- Treated timber
- Asbestos-containing materials
- Panels containing expanded polystyrene (sandwich panels)
- Paints, resins and varnishes.

3.3 Types of fires and their products

Non-flaming fires

Slow thermal decomposition results in oxidation in non-flaming conditions. The products are rich in organic compounds and are usually highly irritating to the respiratory tract. Other products include inorganic acids and carbon monoxide. These fires are rarely a

² A PM₁₀ is particulate matter with an aerodynamic diameter of up to 10 microns.

³ Polychlorinated dibenzo-*p*-dioxins (PCDDs) and polychlorinated dibenzofurans (PCDFs) are collectively referred to as dioxins.

public health risk beyond the building, although they may have a strong smell and represent an environmental nuisance to surrounding areas.

Well-ventilated fires

These occur when there is a lot of air. The levels of smoke and toxic products are initially low, but as the fire develops, carbon monoxide and carbon dioxide production can become significant, and inorganic compounds may be released as gases.

Controlled flaming fires

These occur when the air supply is restricted. This type of fire threatens the wider environment beyond the building of origin, including the occupants within large buildings. High concentrations of carbon monoxide, carbon dioxide, hydrogen cyanide, organic products, smoke and inorganic acid gases can occur (Health Protection Agency 2002).

3.4 Combustion products

Fires in a range of industrial facilities can release combustion products that are potentially hazardous to health. Combustion products are determined by the type of material burning and type of fire (see above). Possible combustion products for fires involving specific materials are listed in Table 1.

Acute hazards associated with fires include the release of unburnt toxic parent materials and/or the production of toxic combustion products. People's exposure will depend on their proximity to the fire as well as the meteorological conditions. The hazards in relation to proximity to a fire can be grouped into two categories.

Close proximity to the fire (ie, within building or room) or immediate vicinity of the fire source (zone 1)

The major risks are from heat and rapid generation of toxic compounds such as asphyxiant gases, carbon monoxide and hydrogen cyanide, and the low availability of oxygen, which may become rapidly lethal in just a few minutes. This area is most likely to be of major concern to emergency services.

Outside the immediate fire zone (zone 2)

The size of the zone 2 area depends on the size of the fire and the chemical nature of the hazards. Toxic gases such as carbon monoxide are likely to be present in the plume at much lower concentrations than in zone 1 and are therefore less likely to be a hazard to

health, unless individuals are directly in contact with the plume. Table 2 shows the combustion products generated from certain burning materials in this zone.

Fire-fighting activity itself can release a range of materials depending on the composition of the fire-fighting water or foam. Contamination of soil and waterways through run-off of fire-fighting water and deposition of airborne contaminants can create long-term hazards.

3.5 Fires involving specific substances

Clandestine methamphetamine labs

Clandestine methamphetamine lab fires have the potential to be highly volatile or explosive. Numerous hazardous substances are present and often in very uncontrolled and unstable conditions.

Asbestos

For guidelines on managing asbestos in relation to fires, see Appendix 1 in this document and *The Management of Asbestos in the Non-occupational Environment: Guidelines for Public Health Officers* (Te Whatu Ora 2023c).

Tyres

Tyres can be difficult to ignite, but once they start, tyre fires can be very difficult to control and extinguish and may burn for a long time. They produce more smoke and more toxic contaminants when they smoulder than when they burn freely (Health Protection Agency 2010). A tyre fire near the town of Amberley, Canterbury in January 2021 provides a good case study of tyre fires and the risk they pose to public health (see <https://www.ecan.govt.nz/get-involved/news-and-events/2018/amberley-tyre-fire-clean-up-progress/>)

Table 1: Indicative combustion products for certain burning materials

	CO	PAHs	Particulates	Chlorinated organic compounds (eg, dioxins)	VOCs	SVOCs	Irritant organic compounds (eg, acrolein and formaldehyde)	O3	HCN	HCl	P2O5	Isocyanate	HF and HBr	NOx	SO2	NH3	Metals
Clandestine drug labs									✓	✓	✓	✓	✓	✓	✓	✓	✓
Landfills										✓		✓	✓	✓		✓	✓
Paints and solvents							✓	✓		✓	✓	✓					✓
Pesticides										✓		✓					✓
Petrol storage																	
Plastics factory/warehouse								✓	✓	✓	✓	✓	✓	✓	✓	✓	
Polystyrene	✓	✓	✓	✓	✓	✓											
Oil storage															✓		
Resins and adhesives									✓	✓		✓	✓	✓		✓	
Rubber, tyres, belting							✓		✓	✓				✓	✓		
Timber storage								✓						✓	✓		✓
Upholstery – polyurethane									✓	✓		✓	✓	✓		✓	

Sources: adapted from Health Protection Agency 2002, with additional information from Bhargava et al 2002; Ergut et al 2007; North Carolina

Department of Health and Human Services (nd); Office of the State Fire Marshal 2004; Shibamoto et al 2007; Wang et al 2001

CO = carbon monoxide; PAHs = polycyclic aromatic hydrocarbons; VOCs = volatile organic compounds; SVOCs = semi-volatile organic compounds;

O3 = ozone; HCN = hydrogen cyanide; HCl = hydrogen chloride; HF and HBr = hydrogen fluoride and hydrogen bromide; NOx = oxides of nitrogen;

SO2 = sulphur dioxide; NH3 = ammonia.

Table 2: Combustion products generated from certain materials outside the immediate fire zone

Material involved	CO	HCN	HCl/HBr/HF	NO _x	SO ₂	P ₂ O ₅	Organic irritants	Inorganic irritants (eg, NH ₃)	PAHs	Other (eg, dioxins)	PM ₁₀
Polymeric material⁴	+/-	+/-	+	+	+/-	-	++	+	+/-	++	++
Wood	-	-	-	+/-	-	-	+	-	+/-	+	+/-
Rubber/tyres	+/-	+/-	+	+/-	+++	+/-	++	+/-	+/-	++	++
Oil/petrol	-	-	-	-	+/-	-	++	-	+/-	+	++

Source: Health Protection Agency 2010.

CO = carbon monoxide; HCN = hydrogen cyanide; HCl/HBr/HF = hydrogen chloride / hydrogen bromide / hydrogen fluoride;

SO₂ = sulphur dioxide; P₂O₅ = phosphorous pentoxide; NH₃ = ammonia; PAHs = polycyclic aromatic hydrocarbons; PM₁₀ = particulate matter of 10 micrometres or less in diameter.

Key:

- +++ likely to be present in very high quantities
- ++ likely to be present in high quantities
- + likely to be present
- +/- may be present at low level
- unlikely to be present

⁴ For example, plastics.

4 Public health risk assessment

Exposure is most likely in the immediate fire zone (zone 1). This should be borne in mind by public health officers who attend a fire, who should take necessary precautions (eg, remain upwind and in the cold zone).

4.1 Initial assessment

Establish the nature and magnitude of the fire by determining:

- The building contents – the quantity and type of hazardous substances
- The age of the building – is asbestos likely?
- The geographic area involved – residential, industrial, sensitive locations (hospitals, schools, early childhood centres, aged care facilities)
- An estimate of the neighbouring population – this information may be qualitative (eg, densely or sparsely populated)

Carry out a rapid risk assessment, covering:

- Proximity of the fire to the closest houses
- Exposure risk:
 - downwind population
 - population exposed to contaminated run-off or deposited material
- Who is most likely to be affected because they live or work near the site of the fire
- Who is likely to be most vulnerable to health effects
- Besides air quality, what will potentially be affected (eg, drinking-water source, recreational water, food, soil).

Site inventories are useful, but they don't necessarily indicate which substances are burning and/or released, and they are not always immediately available or up to date. Initial risk assessment is based on smoke and combustion products unless the material on fire has been identified. The main emissions of concern arising from any fire will be combustion products, which are determined by the burning material and the type of fire. Combustion products include particulate matter, and irritant and asphyxiant substances.

Initial decisions will be made on the basis of this rapid assessment and invariably incomplete information. As further information comes to hand the risk assessment should be refined. However, all chemical risks cannot be identified and assessed with certainty because the combustion products discharged and in what quantities will remain unknown.

4.2 Further assessment

Hazard identification

- What health effects are caused by the contaminant(s)?
- What is the frequency and severity of these health effects?

Exposure assessment

It is unlikely you will be able to measure contaminant levels during the critical time for acute exposure. However, factors that influence exposure (and dose) are:

- Age (eg, infants, children, older people)
- Health status (eg, pregnancy, asthma, chronic obstructive respiratory disease, cardiovascular disease)
- Behaviour and activities (eg, exercising outdoors – increased physical activity causes deeper respiration and more fine particles are inhaled)

It is also important to determine:

- The extent of population exposure during a certain time period
- How many people are exposed.

Dose–response relationship

What are the health effects at different exposure levels?

Risk characterisation

What is the risk of health effects in the exposed population? The wind and weather dilution factors for the plume will reduce its potential toxicity. The major immediate risk to public health is likely to be exposure to irritants and particulates. Irritant gases, even at low concentrations, may cause significant irritation of the eyes and respiratory tract, which may be resolved following removal from the exposure, with no long-term consequences.

The generation of more complex products such as PAHs, dioxins and particulate matter are of concern, but are likely to present a significantly greater risk from long-term or repeated exposure than following a single exposure.

Exposure modelling is complex, and visual observation and environmental monitoring often provide more useful estimates of exposure. In the response stage of the event, it is usually impossible to make a quantitative risk assessment.

There is the potential for continued public exposure to chemical hazards once the fire is over, depending on the extent of contamination. However, living in a contaminated area after a fire does not necessarily mean there is a public health risk. This depends on how hazardous the level of a contaminant is and the existence of exposure pathways. Evacuation may be necessary if contamination is severe.

5 Evacuation or sheltering?

Assuming evacuation and sheltering are both feasible, the choice of one over the other depends on the balance of risks. This decision will depend on the exposure level and duration. Evacuation of people from the area of likely contamination to a safe area by emergency services is often a precautionary measure. Some people may opt to self-evacuate. However, unless there is a potential risk from explosion (eg, LPG cylinders) or spread of the fire, sheltering is likely to be more effective at protecting public health.

The evidence supporting this is largely from modelling, although Kinra et al (2005) found more symptoms were reported among those evacuated than among those sheltered in response to a large plastics factory fire, where partial evacuation of residents similarly exposed to the smoke plume occurred. This difference did not persist beyond two weeks. In this study, direct exposure to smoke was a more important determinant of illness (four or more symptoms) than 48-hour cumulative exposure.

Expert guidance in the United Kingdom favours sheltering over evacuation for chemical air pollution incidents, including fires. However, Baxter (2005) notes that the effects of low cumulative exposure to irritants on those with pre-existing respiratory disease needs to be studied following sheltering.

5.1 Aspects to consider when deciding whether to evacuate or shelter

Important aspects to consider when making a decision on whether to shelter or evacuate people potentially exposed to a fire include:

- Fire management:
 - Likely duration of the event
 - Controlled burning or fire-fighting
- Hazardous substances:
 - Extent of health hazard (highly toxic, toxic, irritant; short-term versus long-term effects)
 - Chemical and physical properties
 - Quantity
- Weather:
 - Wind direction

- Rain
- Forecast
- Effect on plume movement and height
- Topography:
 - Effect on plume movement and height
- Exposure:
 - Distance from fire source of nearest houses
 - Timing (already exposed, imminently, not for several hours)
 - Likely duration (hours, days)
- Population:
 - Location
 - Size
 - Characteristics (eg, people with impaired mobility, elderly, those at special risk, such as on home dialysis or oxygen use)
 - Residential facilities (eg, boarding school, rest home, hospital)
- Time available to evacuate
- Time of day
- Transport availability.

Controlled burning minimises soil and water contamination because there is no run-off. Under favourable conditions it may also reduce air pollution due to more efficient combustion and dispersion. However, if the plume comes to ground there is a risk of short-term air pollution and soil and water contamination.

In contrast, firefighting with water or foam poses a risk of soil and water contamination from run-off, depending on containment measures. It may also reduce the combustion temperature, leading to more toxic air contaminants and reduced plume buoyancy, which can increase the ground-level impact (Health Protection Agency 2010).

Health effects may occur among evacuees from direct exposure to smoke and the psychological impact of evacuation.

5.2 Evacuation

Evacuation is preferable when the area is not yet exposed but will become exposed due to forecast wind direction, and the likely exposure duration means protection by sheltering may be insufficient. Evacuation may also be a better option if there is a:

- Known or suspected highly toxic substance
- Risk of explosion
- Relatively small number of evacuees.

For evacuation to occur there must be sufficient time for people to:

- Be informed (door-to-door, loud hailers, radio/TV)
- Get essentials (eg, medication, baby supplies, pets, cash/cards).
- Close all doors and windows
- Secure their homes and leave.

It is more difficult to carry out evacuation effectively late at night or in the early hours of the morning. Note that evacuation must be to a sufficient distance away so that people will not have to be moved again if the wind changes.

The decision to authorise return depends on adequate information to support the conclusion that the area is safe. After a major fire, this may require some environmental monitoring data. Decision-making also involves consideration of the negative health effects of evacuation (eg, the psychological impacts).

Criteria that need to be met before authorising the return of evacuees include:

- The incident is under control and is not expected to escalate
- Residential premises are considered safe
- If necessary, environmental sampling and analyses have been completed
- Advice has been provided about actions that should be taken on returning home, such as opening windows and doors to ventilate the house for an appropriate time
- Advice has been provided about who to contact if health effects develop (eg, Healthline, general practitioner).

It is not possible to include a list of chemicals with levels at which return is regarded as safe due to the number of chemicals that could be involved. Ultimately the decision to allow return will be a matter of judgement, informed, if necessary, by discussion with the Institute of Environmental Science and Research Ltd (ESR). It will depend on the toxicity of the substances (where known), the existence of exposure pathways and the feasibility of any intervention to prevent exposure from a given pathway. In instances where samples have been taken and return has occurred before the results are available, the results will inform advice about the need for any protective actions to continue.

5.3 Sheltering

Sheltering is used when evacuation would cause a greater risk than staying put, or evacuation cannot be carried out. During sheltering, people are advised to stay indoors (with their pets), close all doors and windows, stay away from windows, and shut off ventilation, air conditioning and certain heating systems to prevent outside air entering indoors.

Depending on building airtightness, this usually results in a significant reduction in contaminant concentrations inside compared to outside for some hours, with the extent of protection depending on the ambient concentration (WHO 2009). Infiltration may be reduced 10 fold even in poorly airtight buildings, and this increases markedly by sealing windows and doors with tape, damp towels or newspaper. It will also be less in an interior room. People can be advised to breathe through a wet cloth over the face if the atmosphere inside becomes uncomfortable (Health Protection Agency 2009).

Residents can be updated through local radio stations, who can provide advice and information about changing conditions and when it is safe to leave the house and/or open windows. A helpline number or mass text messaging could potentially be provided through local Emergency Management.

6 Environmental sampling

6.1 When to consider collecting environmental samples

Environmental samples may be collected during a fire to identify and monitor air- and water-borne contaminants, or afterwards to determine if contamination of the surrounding area has occurred. Situations where environmental sampling may be appropriate include:

- A residential community is likely to be exposed to airborne contaminants
- The fire involved a large quantity of hazardous substances
- Solid/visible contamination is present in a residential property, educational facility or parkland (eg, dust, ash or other debris from the fire, including burnt building materials)
- Asbestos-containing materials are present
- Notification of an environmental poisoning has been received and/or people self-report with symptoms following a fire.

If contamination of food (including non-commercial food and food growing areas) or drinking water may be of concern, public health officers should ensure the Ministry of Primary Industries and/or Taumata Arowai respectively are be informed.

6.2 Where to collect samples

It is important to take samples at sites that are considered important because of potential human exposure and public health risks from chemicals released, in addition to sites where the environment might have been affected. These include sensitive locations such as schools and early childhood centres, homes representative of the highest exposure, parks, and playing fields.

The regional council may already have air quality sampling sites nearby, or may be able to deploy portable air sampling equipment.

6.3 Preparing a sampling plan

Information needed to prepare a sampling plan

The sampling strategy will be incident specific, and in some cases, samples will need to be collected under urgency on an *ad hoc* basis (eg, fire-fighting water run-off samples, air quality samples). However, if sampling after an incident, a sampling plan should be prepared before commencing sampling whenever possible.

A well thought-out sampling plan will ensure that samples are collected from appropriate locations using valid sampling and handling procedures. Table 3 lists the information needed to prepare a robust sampling plan. If you are sampling after the event has finished, some information may have already been collected as part of a Hazardous Substance Incident Report to the Environmental Protection Authority. In some cases, the plume direction and likely deposition zones will need to be modelled prior to sampling, using modelling software.

Table 3: Information needed to prepare a sampling plan.

Information required	Information sources
Facility information, including: chemicals involved – type and amount construction and age of building	Site owner, operator or workers FENZ Regional and city/district council (resource consent information)
Type of fire How was the fire extinguished (what agents were used?)	Emergency services
Temperature of fire	FENZ Building Research Association of New Zealand
Properties and toxicity of the chemicals involved	FENZ National Poisons Centre TOXINZ database PubChem EPA – HSNO Chemical Classification and Information database ESR Safety data sheets

Combustion products	FENZ National Poisons Centre Safety data sheets ESR See Table 1
Populations likely to be affected	City/district council Regional council Te Whatu Ora, NPHS ESR can arrange plume modelling if necessary
Weather conditions	Regional council National Institute of Water & Atmospheric Research (NIWA) MetService

Source: adapted from Watterson et al 1999

6.4 What samples should be collected?

Sample locations can be identified *ad hoc* following visual observation, focusing on sites within possible plume-grounding areas. Fires generate a plume, which may contain gaseous pollutants, smoke and relatively large particles. The dispersion of a plume from a warehouse or factory, although it can be calculated, is a relatively complex process.

Studies conducted to assess the dispersion from warehouse plumes have shown that only when the building has suffered partial structural collapse there will be large amounts of heat released and high plume buoyancies created. For structurally intact buildings, most fire plumes will be ground-based with little plume rise.

The major factors that affect longer-range plume behaviour (over 1 km) are the heat release and the way the plume is distributed over the building. It should be noted that plumes from open-air fires will be buoyant (many hazardous substances at factories are stored in the open).

If safe to collect, environmental samples may include the following:

- At the time of fire (in order to identify products of combustion), air sampling within the plume, under the plume and/or at plume grounding; fire-fighting water run-off samples if safe and feasible to collect
- After the fire is contained and controlled (in order to identify other contaminants, such as asbestos), collect from:
 - the fire site, including air, debris, and soil samples,

- the area of plume deposition, including windowsill wipes and gutter run-off samples, particulate and debris, and soil samples.

Consider having samples that may be contaminated analysed urgently. Other samples may be held and only analysed if required. The type of substance tested for will depend on the characteristics of the building and the chemicals it contains. Occasionally, sampling may be done to address public concern (eg, in relation to asbestos).

6.5 Sample collection

Because sample collection may be urgent and the results can be compromised by unsatisfactory sampling containers, a small collection of glass solvent-washed bottles (like those used for SVOCs) and zip-lock bags should be kept for emergencies. The number and types of samples to be collected will depend on the size and location of the fire and the hazardous substances involved.

ESR should be contacted for assistance with developing the sampling plan, sourcing sampling containers, and determining the number of samples to be collected (telephone 03 351 6019; fax 03 351 0010). Sources of information on how to collect samples from specific types of fires are listed in Table 4.

Remember: Do not put your or other people's safety at risk when collecting samples.

Whenever possible, collect background samples from areas known to be unaffected for comparison. Samples from background or control sites (ie, the samples likely to have the lowest levels of contamination) should be collected first to avoid cross-contaminating samples. Make sure you change gloves and either change or clean any sampling equipment between samples to avoid cross-contamination. Record a Global Positioning System location and take a photograph of each sampling site for future reference.

Air samples

Air quality falls within the responsibilities of the regional council, but depending on the expertise or resources of the area, guidance may be sought from the NPHS. Public health officers have some responsibilities for the overall assessment of risk in such situations, and for providing advice, to councils in particular, on management from a public health perspective.

The type of substance tested for will depend on the characteristics of the building and the chemicals it contains. Samples could be tested for a host of airborne contaminants,

including VOCs,⁵ PAHs, nitrogen oxides, sulphur, particulates, asbestos, and other contaminants of concern.

Fire-fighting water run-off

Samples of fire-fighting water run-off may be collected to provide information on the types of contaminants that could contaminate ground and surface water. Fire-fighting run-off water is likely to contain a mixture of combustion products and residues of any chemicals present at the facility, as well as any additives used in firefighting, such as foam. During the fire, much of the flame suppressant foams used could produce hydrogen fluoride due to thermal degradation.

Soil samples

Soil samples should be collected following the protocols in *Contaminated Land Management Guidelines No 5: Site investigation and analysis of soils* (Ministry for the Environment, revised 2021). The sampling depth should be chosen with care to ensure that elevated concentrations present on the surface are not diluted by cleaner underlying soil. There is limited information available on soil contaminant levels in urban areas in New Zealand, so background samples will also need to be collected for comparison.

Contaminated land is the responsibility of territorial authorities, but they may seek advice from public health officers.

Table 4: Sample collection guidelines

Sample type	Guideline	Source
Water	<i>Water Quality – Sampling, Measuring, Processing and Archiving of Discrete River Water Quality</i>	National Environmental Monitoring Standards (NEMS), www.nems.org.nz/documents/
Soil	<i>Contaminated Land Management Guidelines No 5: Site investigation and analysis of soils</i>	Ministry for the Environment, revised 2021 https://environment.govt.nz/publications/contaminated-land-management-guidelines-no-5-site-investigation-and-analysis-of-soils
Dust wipes	<i>The Environmental Case Management of Lead-exposed Persons: Guidelines for Public Health Officers</i> (revised edition)	Te Whatu Ora 2023b www.tewhatauora.govt.nz/our-health-system/environmental-health/hazardous-substances/lead

⁵ The FENZ hazmat/command vehicle may have a photo-ionisation detector (PID). This enables measurement of VOCs.

Dust (including soot) sampling

Dust wipes

Dust wipes can be collected following the protocols given in *The Environmental Case Management of Lead-exposed Persons: Guidelines for Public Health Officers* (Te Whatu Ora 2023b). Commercially available 'wet wipes' should only be used to collect metal samples. The choice of wipe material for organic contaminants will need to be discussed with the laboratory beforehand. For organic contaminants, or where the contaminants are unknown, use either a non-medicated sterile wrapped gauze pad or a tissue moistened with water. Unused wipe material from the same batch should also be sent to the laboratory for blank analyses. Measure the approximate size of the sampled area.

Sweep sampling

Sweep sampling can be used to collect dust and ash from surfaces, and possibly guttering. Sweep the residue onto a clean piece of photocopy paper or aluminium foil and transfer into the container. Measure the area sampled. If the material is wet, a clean dedicated metal spoon can be used to collect samples into a sample container.

Asbestos-containing materials (ACM)

Older buildings are commonly clad with ACM. Materials that contain asbestos deteriorate during fire, releasing asbestos fibres into the air. Asbestos must be identified urgently. Do not let untrained and unprotected staff remove debris. In cases where there is a potential for public health risk, public health officers should collect and send samples to Capital Environmental Services Ltd (CES) (telephone 04 566 3311). CES should be contacted for advice on how to sample and the number of samples to collect.

In an emergency CES will provide advice and, if necessary, the NPHS will authorise their scientists to make site visits, as occurred at the former Patea freezing works asbestos fire. The NPHS operates a formal on-call service, so for emergency responses telephone 0800 GET MOH.

Appendix 1 of this document should be read in conjunction with these guidelines for dealing with fires involving asbestos-containing materials.

6.6 Analysis suites (water, soil, dust wipes, air)

The choice of analyses will vary depending on the type and quantities of hazardous substances involved in the fire. Common analytical tests are listed in Table 5. Contact ESR prior to collecting samples (telephone (03) 351 6019). ESR will provide advice on the

appropriate sampling suite, arrange for the appropriate sample containers if sampling is non-urgent, and confirm whether the analyses will be covered under the 'supporting local needs' service.

6.7 Sample transport and storage

Advice should be sought from the analytical laboratory on appropriate sample transport and storage. Generally, all samples should be kept cool and out of direct sunlight. Each sample container should be placed in a separate zip-lock bag to avoid cross contamination, either through direct contact with another sample or through leaks from a sample container. Keep samples likely to be highly contaminated separate from other samples. Check that all the labels are correct before submitting the samples for analysis.

6.8 Ambient air monitoring

In New Zealand there is only a limited amount of deployable equipment available to monitor air quality during a fire. Some regional councils may have portable equipment that could be used. Some industries may also undertake routine monitoring. It is possible that in some cases, depending on the location of the fire, data could be obtained from regional council air quality monitoring stations⁶ and any other sites in close proximity undertaking air quality monitoring for resource consent compliance.

Filters from the intakes of ventilation systems in adjacent buildings may be able to be analysed to provide an indication of what particulate materials people may have been exposed to during a fire. If filters are collected for analysis, information on the type and make of filter, the installation date and the flow rate of air through the filter will be needed.

If portable monitoring equipment is used to monitor ambient air quality, collect the sample(s) only from the edge of the evacuation zone. **Do not attempt to move closer to the fire. If samples are needed from nearer to a fire or from within a smoke plume, discuss with the incident controller how this can be achieved (eg, a fire fighter in full personal protective equipment may be able to obtain the sample).**

⁶ Ambient air monitors generally only measure PM₁₀, so larger particles will not be collected. Also, volatiles will be lost from the filter. Ambient dust monitors are not suitable for this type of sampling.

Table 5: Possible analytical tests according to sample type

Analysis suite	Water	Soil	Dust wipes	Air	Notes
Metals	✓	✓	✓	✓	Analysis suite will depend on the chemicals involved in the fire.
VOCs	✓			✓	VOCs are unlikely to persist in soil and dust samples.
SVOCs	✓	✓	✓		
Major ions	✓				Major ions are only of health significance in drinking-water.
pH	✓				
Pesticides	✓	✓	✓	✓	Only necessary if pesticides are involved in the fire.
Chlorinated organics (eg, dioxins)		?	?	✓	Will depend on the size of the fire and the chemicals involved.
PAHs	✓	✓		✓	Will depend on the size of the fire and the chemicals involved.
Particulates, SO ₂ , NO _x , total fluoride*				✓	Will depend on the size of the fire and the chemicals involved.

* Total fluoride is used as a proxy measure of gaseous and particulate hydrogen fluoride that may have been released during the fire.

Notes:

- 1 Dioxins and PAHs can be present unless the combustion involves only 'clean' material (eg, wood).
- 2 VOCs = volatile organic compounds; SVOCs = semi-volatile organic compounds; PAHs = polycyclic aromatic hydrocarbons; SO₂ = sulphur dioxide; NO_x = oxides of nitrogen.

6.9 Interpreting the sampling results

Guidelines and standards that can be used to assist with the interpretation of sampling results are listed in Table 6. Air quality data can be compared against ambient air quality guidelines, national environmental standards and the US *Acute Exposure Level Guidelines*.⁷ The *Acute Exposure Level Guidelines* (AELGL) are designed to protect the public (including susceptible populations) from acute exposure in an emergency for five

⁷ Available at: <https://www.epa.gov/aegl>

exposure periods, ranging from 10 minutes to eight hours. There are three concentration levels (AELG-1, AELG-2 and AELG-3) based on the severity of effects (reversible irritation or discomfort, or asymptomatic non-sensory effects; serious or irreversible effects, or impaired ability to escape; life-threatening effects or death) for each exposure period. Other Guidelines can also be used⁸. Temporary Emergency Exposure Limits (TEELs)⁹ are levels set to protect the general population, including susceptible populations above which certain health effects are not expected when exposed for longer than one hour (TEEL-1, TEEL-2, TEEL-3). TEELs are intended for use until AEGLs or ERPGs are adopted for chemicals.

Table 6: Guidelines and standards for interpreting sampling results

Sample type	Guideline	Source
Soil*	<i>Resource Management (National Environmental Standard for Assessing and Managing Contaminants in Soil to Protect Human Health) Regulations 2011 (the NES)</i> <i>Methodology for Deriving Standards for Contaminants in Soil to Protect Human Health</i>	New Zealand Legislation http://legislation.govt.nz Ministry for the Environment https://environment.govt.nz/assets/Publications/Files/methodology-for-deriving-standards-for-contaminants-in-soil.pdf
Dust wipes	<i>World Trade Center Indoor Environmental Assessment: Selecting contaminants of potential concern and setting health-based benchmarks</i> (May 2003)	United States Environmental Protection Agency https://archive.epa.gov/wtc/web/pdf/contaminants_of_concern_benchmark_study.pdf

⁸ <https://response.restoration.noaa.gov/oil-and-chemical-spills/chemical-spills/resources/emergency-response-planning-guidelines-erpgs.html>

⁹ <http://response.restoration.noaa.gov/teels>

Air	<p><i>Acute Exposure Guideline Levels (AEGLs)</i></p> <p>Emergency Response Planning Guidelines (ERPGs)</p> <p>Temporary Emergency Exposure Limits (TEELs)</p>	<p>United States Environmental Protection Agency https://www.epa.gov/aegl</p> <p>https://response.restoration.noaa.gov/oil-and-chemical-spills/chemical-spills/resources/acute-exposure-guideline-levels-aegls.html</p> <p>https://response.restoration.noaa.gov/oil-and-chemical-spills/chemical-spills/resources/emergency-response-planning-guidelines-erpgs.html</p> <p>https://response.restoration.noaa.gov/oil-and-chemical-spills/chemical-spills/resources/temporary-emergency-exposure-limits-teels.html</p>
-----	--	--

* The NES came into effect on 1 January 2012.

Additional site history information may need to be collected to assist with interpretation, because in some cases previous activities in an area may have also been contributing sources. For example, elevated concentrations of lead and PAHs are likely to be found in old urban areas, and their presence in dust wipes may not be due to a fire. Regional and city/district council staff may be able to provide additional information that could help to interpret the results.

7 Communication

7.1 During the fire

Crisis and emergency risk communication requires decisions to be made within a short timeframe. These decisions may be irreversible and have an uncertain outcome, and information may be incomplete (Reynolds 2002). The STARC Principle (WHO 2009), which covers the elements of successful communication, is useful to consider when developing risk communication messages:

- **Simple** people want to hear words they understand
- **Timely** people want information as soon as possible
- **Accurate** people want to-the-point information
- **Relevant** responses to questions should be factual
- **Credible** openness is essential to credibility.

The initial public health communication should include:

- The nature of the fire
- Who is (and is not) currently under threat
- Evacuation orders and routes, or 'go in, stay in, tune in'
- The measures being taken to contain and/or extinguish the fire
- Hazards, exposure pathways, protective actions
- How to get further information
- When an information update will be given.

Appendix 2 contains resources developed by the Centers for Disease Control and Prevention's *Message Development for Emergency Communication* and *You're the Spokesperson – What You Need to Know* (Reynolds 2002). Examples of health messages are contained in Appendix 3.

7.2 After the fire

It is important to assess public concerns about possible environmental contamination and their personal exposure, because these may indicate a need for further investigation and will guide the presentation of results to show that people's concerns have been addressed.

Immediately after the fire, a health information sheet may be useful for residents. This may give advice on topics including (where relevant):

- House cleaning, including surface soot/dust removal (wet wiping rather than sweeping, vacuum cleaner with HEPA filter)
- Recreational water use
- How to get further information
- What to do if symptoms or health concerns arise.

Consider how to most effectively get this information to residents. For example, attaching the leaflet to the front door may be more effective for evacuees returning home than placing it in the mailbox. It may also be necessary to hold a public meeting in association with other key agencies (eg, local government in the recovery stage).

8 Health monitoring

Whether any form of health monitoring occurs or not is a matter of judgement and will depend on the scale of the fire and the potential (including public perception) for significant population exposure. Health monitoring can be initiated in the response or recovery stage of the incident.

8.1 Immediate health effects

Immediate symptoms may indicate either high exposure or high toxicity. The most common signs and symptoms of acute chemical exposure are non-specific, such as nausea, vomiting, headache, skin irritation, eye irritation, fatigue, respiratory symptoms, and central nervous system symptoms.

There are two main types of effects:

- Syndromic conditions (eg, symptoms of respiratory irritation such as cough, sore throat/nose)
- Exacerbation of pre-existing diseases (eg, asthma, angina).

Data sources for the type of condition and outcome include:

- Ambulance attendances
- General practice or accident and medical clinic attendances
- Emergency department attendances
- Healthline calls.

Existing systems can be used to assess the fire's immediate impact as well as an alert for emerging acute health issues. Analysis of effects other than those directly related to the fire (eg, burns and smoke inhalation) require comparative information, which can be from the same population if pre-fire data are available. Alternatively, differences in exposure (eg, based on distance) within the same population could be looked at.

Health monitoring in the recovery stage, such as a survey, can be carried out in response to community concerns about exposure and ill health. Issues that need to be considered before monitoring is undertaken in this situation are:

- Community expectations about monitoring, resolving causation or detecting subtle effects (which are influenced by population size, biases, control or reference group availability, and the availability of outcome data for a control period)
- Confidentiality of information
- How and when information will be made available to the participants

- Interpretation of information (at individual and group levels) if any testing (eg, lung function) is carried out
- How information will be used (Environmental Health Standing Committee (enHealth) 2012¹⁰).

Suggested content for inclusion in a questionnaire is given in Appendix 4.

8.2 Long-term health effects

The assessment of possible chronic effects among the exposed population is likely to require an epidemiological study and is outside the scope of these guidelines. Such effects would be determined by the mix of chemicals, timing and duration of exposure, and proximity to the fire. Issues such as statistical power would need to be taken into consideration. Those on site (likely to be workers) and first responders will be at greatest risk of exposure. Any occupational health investigation would be the responsibility of the WorkSafe New Zealand.

Long-term health effects may also include mental health effects relating to the experience of a major fire.

¹⁰ <https://www.health.gov.au/resources/publications/enhealth-guidance-guidelines-for-assessing-human-health-risks-from-environmental-hazards?language=en>

9 Resources and sources of information

Resources and sources of information that may be useful for managing the public health risks from major fires include:

- Maps, including Google satellite view (<http://maps.google.co.nz>)
- Geographic information systems (GIS) – these provide a clearer picture to aid in risk assessment (eg, to plot the fire location, direction of plume, sensitive locations, evacuation zone; to estimate the population living within certain distances of the fire and potentially within the plume; or to map demographic factors such as age).
- The FENZ hazmat/command vehicle – this will have online access to databases
- The National Poisons Centre – <https://poisons.co.nz/> or 0800 764 766
- The Environmental Protection Authority – (<https://www.epa.govt.nz/industry-areas/hazardous-substances/>)
- The Environmental Protection Authority's HSNO Chemical Classification and Information database is available at: <https://www.epa.govt.nz/database-search/chemical-classification-and-information-database-ccid/>
- PubChem – <https://pubchem.ncbi.nlm.nih.gov/>, which gives toxicological information on about 5000 chemicals
- Air dispersion modelling: this takes account of wind speed and direction to predict plume movement, and can then be used to define the population potentially exposed to airborne contaminants and to provide estimates of the number of people exposed to certain levels of contaminants (if necessary, this can be arranged through ESR)
- MetVuw and Met Service provide initial weather forecasts.

Appendix 1:

Public health aspects arising from a fire involving asbestos containing materials: fact sheet

Following a number of fires that involved asbestos-containing materials, public health staff requested a fact sheet on the public health issues that may arise from such fires. This information was prepared in consultation with Dr Richard Hoskins and David de Jager (public health officers), and Linda Dwyer (Capital Environmental Services Ltd).

The development of this fact sheet was prompted by the Taranaki Patea freezing works fire. Although the local public health service managed the situation very well, it became evident that very limited information is available on the potential public health consequences when dealing with fires involving asbestos-containing materials (ACM). The following information will assist NPHS when dealing with such large-scale fires.

Thermal stability of asbestos

Asbestos was widely used because of its fire-resistant properties. However, it is not thermally stable when exposed to high temperatures. Chrysotile (white asbestos) decomposes at 800–850°C and the amphiboles ((crocidolite (blue) and amosite (brown) asbestos)) at 800–1000°C. Asbestos fibres will readily be converted to dust at prolonged exposure to such temperatures. In sheet form, asbestos does not offer any fire resistance and it cracks in building fires. In a fire, asbestos cement sheeting will disintegrate and can explode, releasing fibres over a wide area, mostly in the direction of the prevailing wind.

Effect of fire on asbestos fibre contamination

The effect of fire on asbestos fibre contamination was investigated and the following conclusions were drawn:

Fire can change the mineral structure and mechanical strength of asbestos, fixing the fibres and transforming it to a less hazardous state. The process will generally affect only the outer layers, leaving most fibres intact within the material. Internal fibres in a fibre bundle will be unaffected due to the insulating quality of the mineral.

A study was commissioned by the Victorian Department of Human Services to examine the concentrations of respirable fibres away from the incident site, ie, fire location using a computational fluid dynamics programme designed to simulate fires of varying sizes. Fires within buildings comprising substantial quantities of ACM do not result in hazardous conditions with respect to respirable asbestos fibres either close to the building or away from the building. This is true of fires involving asbestos cement sheet only.

Friable asbestos with in a fire does give off respirable sized fibres, such as the Broadcasting House fire.¹¹

Sampling of the ash residue after the CESARE building test fire revealed that respirable asbestos fibres were not found in the ash, but asbestos fibre bundles were present. These fibre bundles, while in their bundled form, are not respirable, however they could become respirable fibres through the clean-up process if the fibre bundles are exposed to further mechanical degradation. Therefore, after a fire, the asbestos fibre bundles in the ash debris should be treated in the same manner as ACM during the clean-up process. Respirable fibre concentrations emitted by the fire were very low. The levels appear to be lower than average background levels. Plume modelling was used in determining the dispersion of respirable asbestos fibres away from a fire location which demonstrated that in this particular test, respirable fibre concentrations close to the fire were extremely small. Theoretically, concentrations reduce further away from the fire, being orders of magnitude lower.

Exposure of the general population

People who reside in the area may be exposed following a fire involving materials containing asbestos. Sources of exposure include:

- direct inhalation of asbestos in the original plume
- inhalation of asbestos fibres resuspended into the air (eg, wind driven or a result of mechanical processes) following deposition on the ground or other surfaces
- ingestion of local produce.

The degree of exposure by the general public will depend upon the concentration of asbestos in the air (directly from the plume during the fire or as a result of re-suspension following fire) and subsequent actions of the public and authorities. For example, rapid removal of significant fallout will reduce the potential for significant re-suspension exposures to the general public, although it may result in exposures to staff involved in clean-up.

¹¹ Broadcasting House, a multi-purpose broadcasting centre on Bowen Street, Wellington, New Zealand, was caught by fire in 1997.

Mitigating factors against significant exposures of the general public following a fire involving ACM

- Not all the ACM present may be involved in the fire.
- Fibres may be entrapped in large pieces of material, etc.
- During a fire, most asbestos cement sheeting will be deposited as large pieces.
- Respirable fibres will be a fraction of the total released.
- Small proportion of fibres may be 'denatured' at prolonged exposure to high temperatures in large scale fires.
- Atmospheric dispersion and deposition (particularly as a result of rain) will reduce concentrations.¹²
- Duration of exposure will be short dependent on the type of ACM present.

Acute adverse health effects

Thermal injury or smoke inhalation is generally the most likely potential acute effect from large scale fires. Asbestos may produce irritation of the skin, eyes and respiratory tract due to mechanical action of the fibres. However, this only occurs at very high air concentration levels well beyond those that members of the public would likely encounter from a fire.

Respiratory symptoms were reported by people who have been exposed in asbestos fire. However, there is no hard evidence to suggest a severe acute health impact after a fire incident associated with asbestos-containing fallout. Despite the lack of hard evidence of an acute health impact, it is important that health professionals are aware of the potential for patients to associate symptoms with such incidents.

Long-term adverse health effects

There is no direct evidence of long-term health risks from fires involving ACM, although the literature in this area is limited. Considering the available evidence on asbestos exposures from fires involving ACM in the context of the results of epidemiological studies of

¹² A survey was conducted on cement sheet roofing and fibre run-off with rainwater over a 12-month period using encapsulated asbestos roofs, a blank and an un-encapsulated roof. Using Scanning Electron Microscope, the fibre run-off with rainwater was found to be in the region of 13 million fibres per litre of water with little observed difference to the results between roof type. One blank of 12 indicated more fibre when compared with the samples after a particular month of exposure. The increase was found to be due to an asbestos cement roof further down the road being removed and replaced that particular month.

occupational and environmental asbestos exposures, it is concluded that the risk of long-term health effects (mesothelioma and lung cancer) are minimal if appropriate clean-up procedures occur.

Evacuation

The usual first course of action is to 'shelter in place' unless directly threatened by fire, in which case fire officers will direct evacuation. If evacuation has taken place for health reasons, the Medical Officer of Health and/or Health Protection Officer will determine when to advise residents that it is safe to return home.

Laboratory analysis

The presence of asbestos in materials cannot be determined definitively by visual inspection. Actual determination can only be made by instrumental analysis, eg, polarised light microscopy, transmission electron microscopy or scanning electron microscopy. It is best to assume that the material contains asbestos until laboratory analysis proves otherwise.

Collect and send samples to Capital Environmental Services Ltd (2–4 Bell Road South, Gracefield, Lower Hutt, phone 04-566 3311) for asbestos analyses to confirm the presence and type of asbestos. Laboratory staff would be able to provide advice on how many samples should be collected for testing and how should these be collected. If necessary, a scientist from the laboratory would be sent to the affected area to provide assistance.

In general, air sampling carried out following asbestos fires will not reveal significant levels of asbestos fibres. Therefore, in many cases it will not be necessary to carry out such monitoring. Monitoring may however be appropriate after large incidents for public reassurance purposes. This is a decision that should be made on a case-by-case basis.

At the earliest opportunity after results are known, they should be made public so that members of the public are fully aware of the situation and can make an informed decision.

Effect of watering

Dependent on water pressure, it is important to note that the addition of water will not result in the further degradation of any asbestos fibre bundle. In particular it has been shown that the application of water is very effective in reducing the likelihood of asbestos fibres from becoming respirable in soils and sands. Land contamination issues are possible as a result of water washing asbestos fibre bundles or pooling water in an area

(as a result of a fire in the area). In case of asbestos cement products, it is unlikely that the asbestos bundles would be sufficient in terms of fibre size and form to generate respirable dust cloud particles, when the water has evaporated. It could be an issue for lagging and friable material as there can be incidences of rainwater puddles from asbestos cement roof leaks that contain significant amounts of friable asbestos.

Clean-up operations within the building should be performed in accordance with the WorkSafe NZ requirements. The application of water will further reduce any exposure risk to nearby personnel working in the area, since wetting down the debris after a fire reduces the risk of respirable asbestos becoming airborne. However, it should be borne in mind that amosite repels water quite well. If large amounts of friable amosite are present, watering will have little effect.

Handling asbestos materials is a specialist task requiring appropriate training and equipment, including personal protective equipment (PPE). There is the potential for the workers involved to be exposed during the process.

Conclusions

The mere presence of asbestos in buildings or in ash/rubble does not necessarily pose a health risk to building occupants or the public. Asbestos fibres of respirable size must become airborne in sufficient concentration to pose a risk from inhalation.

Exposure to members of the public during and in the aftermath of a fire involving ACM is expected to be minimal if appropriate clean-up operations are undertaken. Thus, the potential for long-term environmental exposure and the associated risk will be minimal. That said, this is dependent on what the ACM in the fire is. If it is lagging, the whole scenario would be different.¹³

Some members of the public perceive a greater risk from large scale fires involving asbestos than is actually the case, and this should be taken into consideration when devising and issuing public warnings.

Bibliography

Bridgman SA. 1999. Lessons learnt from a fire associated with asbestos-containing fallout. *Journal of Public Health Medicine* 21(2): 158–65. Bridgman SA. 2000. Acute health effects of a fire associated with asbestos-containing fallout. *Journal of Public Health Medicine* 22(3): 400–5.

¹³ Air tests taken, in windy conditions, for a few weeks after the Broadcasting House fire in 1997 showed large amounts of airborne asbestos fibre. The fibre had been distributed over a very large area by the smoke plume. This included inside buildings with open windows and on far sides of high rise in the vicinity of the fire. Some of this fibre had been heat altered, but this was only a very small portion of what was collected by dust wipes.

Bridgman SA. 2001. Community health risk assessment after a fire with asbestos containing fallout. *Journal of Epidemiology and Community Health* 55: 921–7.

Smith KR, Saunders PJ. 2007. *The Public Health Significance of Asbestos Exposures from Large Scale Fires*. London: Health Protection Agency.

Victorian State Government, Department of Human Services. 2006. *Report on the Investigation of the Effect of Fire on Asbestos Fibre Contamination*. Melbourne, VIC: Noel Arnold & Associates Pty Ltd. URL: <https://www.health.vic.gov.au/publications/report-on-the-investigation-of-the-effect-of-fire-on-asbestos-fibre-contamination>

Appendix 2:

Centers for Disease Control and Prevention's resources for crisis and emergency risk communication

This appendix reproduces copies of *Message Development for Emergency Communication and You're the Spokesperson – What you Need to Know* (Reynolds 2002).

Message development for emergency communication

First, consider the following:

Audience	Purpose of message	Method of delivery
<ul style="list-style-type: none">Relationship to eventDemographics (age, language, education, culture)Level of outrage (based on risk principles)	<ul style="list-style-type: none">Give facts/updateRally to actionClarify event statusAddress rumoursSatisfy media requests	<ul style="list-style-type: none">Print media releaseWeb releaseThrough spokesperson (TV or in-person appearance)RadioOther (eg, recorded phone message)

Six basic emergency message components

1. Expression of empathy:

2. Clarifying facts/call of action:

Who

What _____

Where _____

When _____

Why _____

How _____

3. What we don't know:

4. Process to get answers:

5. Statement of commitment:

6. Referrals:

For more information: _____

Next scheduled update: _____

Finally, check your message for the following:

Positive action steps Honest/open tone Applied risk communication principles Test for clarity Use simple words, short sentences	Avoid jargon Avoid judgmental phrases Avoid humour Avoid extreme speculation
---	---

You're the spokesperson – what you need to know

<p>CRISIS EMERGENCY RISK COMMUNICATION</p> <ul style="list-style-type: none"> • Build trust and credibility by expressing: • Empathy and caring • Competence and expertise • Honesty and openness • Commitment and dedication <p>Top tips:</p> <ul style="list-style-type: none"> • Don't over reassure • Acknowledge uncertainty • Express wishes ("I wish I had answers") • Explain the process in place to find answers • Acknowledge people's fears • Give people things to do • Ask more of people (share risk). <p>As a spokesman:</p> <ul style="list-style-type: none"> • Know your organisation's policies • Stay within the scope of responsibilities • Tell the truth, be transparent • Embody your agencies identity <p>CONSISTENT MESSAGES ARE VITAL</p>	<p>Prepare to answer these questions</p> <ul style="list-style-type: none"> • Are my family and I safe? • What can I do to protect myself and my family? • Who is in charge here? • What can we expect? • Why did this happen? • Were you forewarned? • Why wasn't this prevented? • What else can go wrong? • When did you begin working on this? • What does this information mean? <p>Stay on message</p> <ul style="list-style-type: none"> • What's important is to remember ..." • "I can't answer that question, but I can tell you ..." • "Before I forget, I want to tell your viewers ..." • "Let me put that in perspective ..." <p>BE FIRST, BE RIGHT, BE CREDIBLE</p>
---	---

Appendix 3:

Examples of health information for the public

Smoke contains particles, gases and water vapour.

Soot is basically carbon dust, although it may contain some irritant chemicals.

Smoke may irritate the eyes, nose, throat and airways. Symptoms can include runny or sore eyes, dry or sore throat, sore nose, cough, tightness of the chest or difficulty breathing.

The small particles in smoke are more harmful than the larger particles because they can be inhaled deep into the lungs.

In healthy people, most symptoms disappear soon after exposure to smoke ends and do not cause long-term health problems. If your symptoms persist, phone Healthline (0800 611 116) for free 24-hour health advice or see your doctor.

Smokers, the elderly, children and those with heart disease, asthma or other lung disease are at greatest risk of harm from smoke inhalation. Avoid exposure if possible.

Outdoors exercise such as jogging causes you to breathe more deeply and inhale more small particles. Small particles are more harmful.

If you have asthma, lung or heart disease, seek medical help if your symptoms worsen and do not respond to your usual measures, or if you experience breathlessness or chest pain.

If you did not experience any symptoms at the time you were exposed to the smoke, you are very unlikely to have any long-term health effects.

Appendix 4:

Checklist for health questionnaire content

Demographic information

Name

Address

Phone number

Date of birth

Age

Sex

Exposure information

Date of exposure

Address where exposed (indoors, outdoors)

Duration of exposure (indoors, outdoors)

Consider whether exposure pathways other than inhalation are relevant and need to be included.

Health effects

Symptom date of onset

Immediate or delayed (how long) symptom onset after exposure

Symptom duration

Symptom list:

- nausea
- headache
- dizziness/light headedness
- drowsiness
- skin rash

- eye irritation
- nose irritation
- sore throat
- shortness of breath
- cough
- wheeze
- chest pain/tightness
- other (please state)

Potential risk factors

Asthma

Chronic obstructive respiratory disease

Bronchitis

Angina

Heart disease other than angina

Cigarette smoker

Hay fever

Eczema

Action taken and outcome

No treatment

Self-treatment (what)

Phoned Healthline, outcome of call

Saw GP, outcome of GP visit

Went to emergency department, outcome

Hospital admission

Date of admission

Diagnosis

Duration of stay

References

Baxter PJ. 2005. Commentary: Evacuation decisions in chemical incidents benefit from expert health advice. *British Medical Journal* 330: 1474–5. URL:

www.ncbi.nlm.nih.gov/pmc/articles/PMC558453

Bhargava A, Dlugogorski BZ, Kennedy EM. 2002. Emission of polyaromatic hydrocarbons, polychlorinated biphenyls and polychlorinated dibenzo-*p*-dioxins and furans from fires of wood chips. *Fire Safety Journal* 37: 659–72.

Environmental Health Standing Committee (enHealth). 2012. *Environmental Health Risk Assessment: Guidelines for assessing human health risks from environmental hazards*. enHealth, Canberra: Commonwealth of Australia. URL:

<https://www.health.gov.au/sites/default/files/documents/2022/07/enhealth-guidance-guidelines-for-assessing-human-health-risks-from-environmental-hazards.pdf>

(accessed 7 September 2023).

Ergut A, Levendis YA, Carson J. 2007. Emissions from the combustion of polystyrene, styrene and ethylbenzene under diverse conditions. *Fuel* 86: 1789–99.

Health Protection Agency. 2002. *Products of Combustion: Draft summary information*. London: Health Protection Agency, Chemical Hazards and Poisons Division.

Health Protection Agency. 2009. *Sheltering or Evacuation Checklist*. London: Health Protection Agency, Centre for Radiation Chemical and Environmental Hazards. URL:

https://webarchive.nationalarchives.gov.uk/ukgwa/20140714074352/http://www.hpa.org.uk/webc/HPAwebFile/HPAweb_C/1194947308210 (accessed 7 September 2023).

Health Protection Agency. 2010. *Chemical Hazards and Poisons Report* 18. London: Health Protection Agency, Centre for Radiation, Chemical and Environmental Hazards. URL:

https://webarchive.nationalarchives.gov.uk/ukgwa/20140714074352/http://www.hpa.org.uk/web/HPAwebFile/HPAweb_C/1287142798000 (accessed 7 September 2023).

Kinra S, Lewendon G, Nelder R, et al. 2005. Evacuation decisions in a chemical air pollution incident:

cross sectional survey. *British Medical Journal* 330: 1471–4. URL:

www.ncbi.nlm.nih.gov/pmc/articles/PMC558452/?tool=pubmed (accessed 7 September 2023).

Ministry for the Environment. 2021. *Contaminated Land Management Guideline No 5: Site investigation and analysis of soils*. Wellington: Ministry for the Environment.

<https://environment.govt.nz/publications/contaminated-land-management-guidelines-no-5-site-investigation-and-analysis-of-soils/> (accessed 7 September 2023).

Ministry for the Environment. 2011. *Methodology for Deriving Standards for Contaminants in Soil to Protect Human Health*. Wellington: Ministry for the Environment. URL:

<https://environment.govt.nz/publications/contaminated-land-management-guidelines-no-5-site-investigation-and-analysis-of-soils/> (accessed 7 September 2023)

New Jersey Department of Environmental Protection. 2020. *New Jersey Department of Environmental Protection Field Sampling Procedures Manual*. Trenton, NJ: New Jersey Department of Environmental Protection. URL: **www.state.nj.us/dep/srp/guidance/fspm/** (accessed 7 September 2023).

North Carolina Department of Health and Human Services. (nd.). *Clandestine Methamphetamine Laboratories Information and Safety Sheet: Injury prevention for first responders, firefighters, law enforcement*. Raleigh, NC: North Carolina Department of Health and Human Services, Occupational and Environmental Epidemiology Branch.

Office of the State Fire Marshal. 2004. *Rings of Fire Revisited: Tire fire prevention and suppression*. Office of the State Fire Marshal, State of California. URL: **<https://citeseerx.ist.psu.edu/document?repid=rep1&type=pdf&doi=8fe75bdd6c0813b79ba45dacedb7d2005d40f9e3>** (accessed 7 September 2023).

Resource Management (National Environmental Standard for Assessing and Managing Contaminants in Soil to Protect Human Health) Regulations 2011. URL: **<http://legislation.govt.nz>**

Reynolds B. 2002. *Crisis and Emergency Risk Communication*. Atlanta, GA: Centers for Disease Control and Prevention.

Shibamoto T, Yasuhara A, Katami T. 2007. Dioxin formation from waste incineration. *Reviews in Environmental Contamination and Toxicology* 190: 1–41.

Te Whatu Ora. 2023a. *Response to Wildfires: Guidelines for Public Health Officers*. Wellington: Te Whatu Ora – Health New Zealand. URL: **<https://www.tewhatauora.govt.nz/our-health-system/environmental-health/environmental-health-in-emergencies>** (accessed 7 September).

Te Whatu Ora. 2023b. *The Environmental Case Management of Lead-exposed Persons: Guidelines for Public Health Officers: Revised 2023*. Wellington: Te Whatu Ora – Health New Zealand. URL: **<https://www.tewhatauora.govt.nz/our-health-system/environmental-health/hazardous-substances/lead/>** (accessed 7 September 2023).

Te Whatu Ora. 2023c. *The Management of Asbestos in the Non-Occupational Environment: Guidelines for Public Health Officers* (5th edn). Wellington: Te Whatu Ora – Health New Zealand. URL: **<https://www.tewhatauora.govt.nz/our-health-system/environmental-health/hazardous-substances/asbestos/>** (accessed 7 September 2023).

Wang J, Levendis YA, Richter H, et al. 2001. Polycyclic aromatic hydrocarbon and particulate emissions from two-stage combustion of polystyrene: The effect of the primary furnace temperature. *Environmental Science and Technology* 35: 3541–52.

Watterson J, Halliwell C, Meharg A, et al. 1999. *Environmental Sampling after a Chemical Accident*. London: Department of Environment, Transport and the Regions (UK).

WHO. 2009. *Manual for the Public Health Management of Chemical Incidents*. Geneva: World Health Organization. URL:

<https://www.who.int/publications/i/item/9789241598149> (accessed 7 September 2023).